


# SECTION VIEW A-1


NOT TO SCALE  
SEE PLAN FOR ALL DIMENSIONS

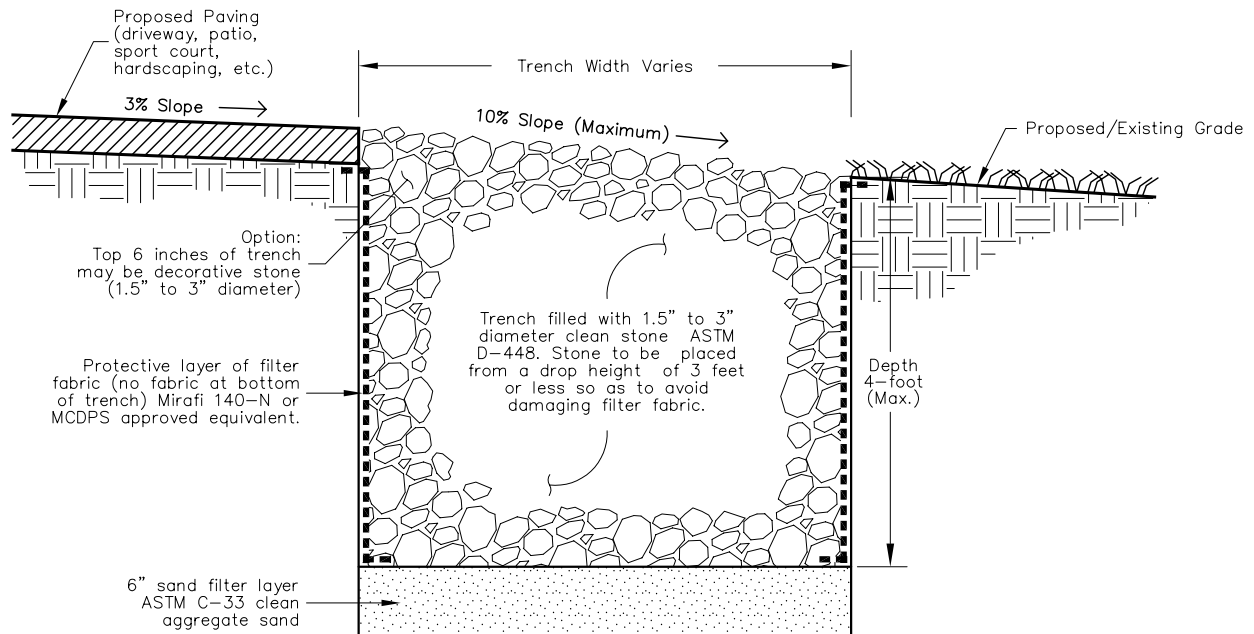


## PLAN VIEW

NOT TO SCALE  
SEE PLAN FOR ALL DIMENSIONS

### LAYOUT OPTION 1

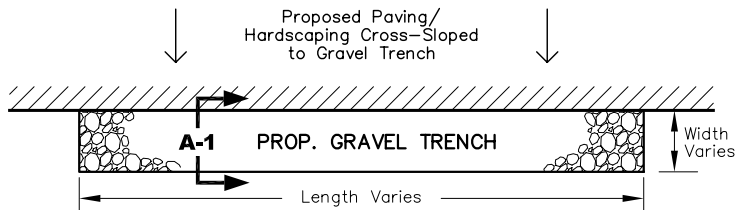

### LAYOUT OPTION 2

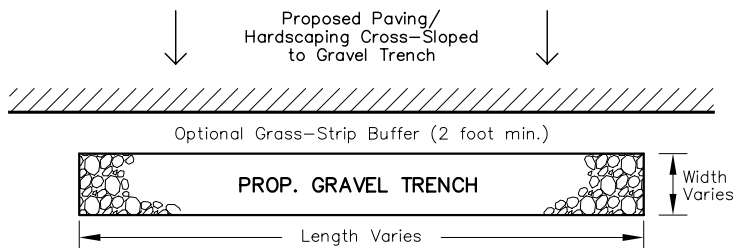

## NOTES:

- Manufactured sand is not acceptable in drywells.
- Drywells must be located:
  - 5 ft min. from property lines
  - 10 ft min. from slab on-grade buildings
  - 20 ft min. from building foundation
  - 20 ft min. from another drywell
  - 30 ft min. from septic trench or tank
  - 50 ft min. from alternate well location
  - 100 ft min. from primary well location
  - so as to minimize any basement seepage
- All dimensions are to be specified by design engineer.
- Drywell locations may be field-adjusted based upon site conditions, with inspector's approval.
- Drywells must be located in undisturbed soil (not in fill).
- Drywells may not be combined or eliminated without MCDPS approval.



**MONTGOMERY COUNTY**  
**DEPARTMENT OF**  
**PERMITTING SERVICES**  
  
**WATER RESOURCES DIVISION**

**GRAVEL TRENCH**  
**DRYWELL FOR**  
**DRIVEWAY/**  
**HARDSCAPING**

**DATE:**  
March 2007

**SCALE:**  
NONE